

C-9401


Conventional Sounder Strobe



Description

C-9401 conventional sounder strobe can give audible and visual notification signal when powered by 24VDC, connected with fire panel to build an alarm system.

Terminals and Installation Holes

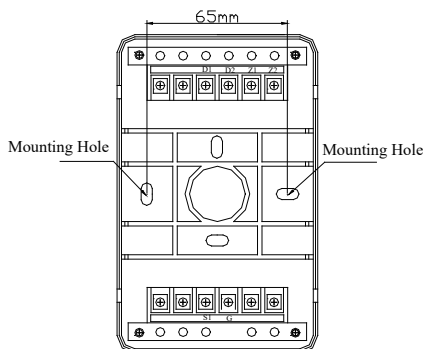

D1: 24VDC Positive
D2: 24VDC Negative

Recommended Cabling

1.0mm² or above fire cable is recommended, but subject to local codes.

Terminals

Operating Voltage	24VDC(20V ~ 28V)
Standby Current	0
Alarm Current	≤160mA
Flashing Frequency	20 ~ 180 times every minute
Alarm Volume	85dB (A weighted @3m)
Operating Temperature	-10°C ~ +50°C
Relative Humidity	≤95%, non condensing
Dimension	144mm×90mm×57mm
Mounting Hole Distance	65mm

Ordering Information and Compatible Products

Part No.	C-9401
Device Name	Conventional Sounder Strobe
Product No.	10100601
Compatible Products	GST102A – GST116A Conventional Panels I-9301 Addressable Single Output Module