

C-9602LW-NG Conventional Gas Detector



Description

C-9602LW Conventional Gas Detector is used to detect leakage of home use combustible gas (LPG, Natural Gas or Coal Gas) in such areas as houses, hotels and apartments. The C-9602LW-NG is specified for detection of natural gas. When leakage is detected, the detector will generate high buzzer alert sound, and provide a dry contact to turn exhaust fan, a 12VDC source to switch off the gas valve.

Features and Benefits

- Drift compensation, to suit environment changing extensively
- Local buzzer alarm
- Self-diagnostic
- Relay output for fan control and Valve shut off

Terminals and Installation Holes

The cover near the bottom is opened by pressing it with strong force. Then terminals for connections can be seen. Those terminals are shown as below.



V+, V-: Connecting with pipe solenoid valve. A 12VDC pulse output to shut off the valve.
K1, K2: 220V/1A normally open contact, closes when detector alarms.
A 220VAC power cable with plug is provided.

Warning:


It's prohibited to connect 220VAC directly through K1 and K2.

Recommended Cabling


0.5mm² or above Fire-resistant cable for V+ and V-
1.0mm² or above Fire-resistant cable for K1 and K2
All cables should be subject to local codes.

Application

The detector is wall mounted type with a bracket.

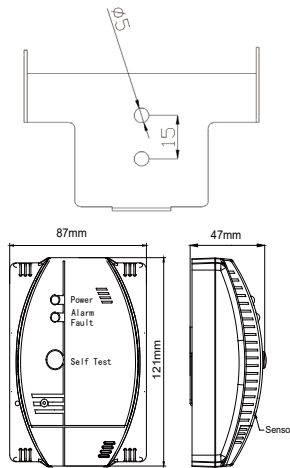

The detector and the gas stove should be placed in the same room. The detector should be mounted above 50cm from the resources or the gas stove. The detector should be within 1.5m ~ 4m to the gas resource or the gas stove.

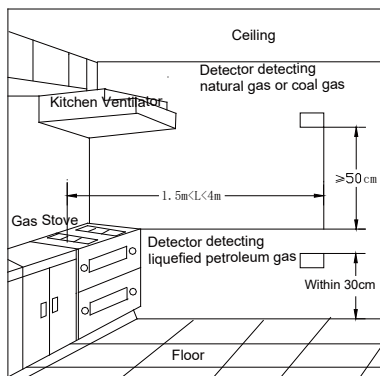

After powered up, the detector will take 3~6 minutes for warm-up well the green LED flashes, and then it will light constantly for normal monitoring.

When the gas density is over its preset value, the detector gives quick intermittent "Tick" sound with red LED quick flashing and K1 and K2 closed. After 3s ~ 7s, the detector will generate a forward pulse current to close solenoid through V+ & V-.

When the gas density goes below the preset value, the detector will automatically stop audio and visual signal and K1, K2 will be self-opened.

Technical Specification

Working Voltage	187VAC- 253 VAC
Power Consumption	Standby States≤3.0W Alarm State ≤5.0W
Indicator	Power LED: Green Alarm/Fault LED: Dual color , red when alarming, and yellow in fault.
Buzzer	Sounds twice per second when alarming, and once every three seconds in fault.
Self-test	Pressing Self-Test, the LEDs will flash in turn and the buzzer will sound three times.
Type of Gas	Natural gas
Alarm Threshold	3000×10^{-6} (6%LEL)
Life of Sensor	5 years
Ingress Protection	IP30
Temperature	-10°C ~ +50°C
Relative Humidity	≤95%, non-condensing
Material	ABS
Weight	320g
Mounting Hole Distance	23mm
Dimension	121mm×87mm×47mm

Caution

1. Avoid using much hair tonic, pesticide, paint, alcohol, diluents etc. near the detector.
2. The detector can only detect the natural gas.
3. Don't install the detector at locations with high temperature (near stoves) or too much oil smoke (near kitchen ventilator).
4. The detector can only control JJ or FCR series solenoid coming with the detector.
5. The detector should be tested every 6 months.
6. The detector can be tested by a lighter. The detector should alarm in about 10 seconds.

Ordering Information

Part No.	C-9602LW-NG
Device Name	Conventional gas Detector
Product No.	10101720