

DC-M9410

Signal Synchronization Module



Description

The DC-M9410 Signal Synchronization Module provides precision synchronization for sounders and strobes.

Features and Benefits

- Small in size, can be installed into single-gang box.
- Provides synchronization circuit for strobes to comply with the latest requirements of UL 1971 *Signaling Devices for the Hearing Impaired*.
- The Module only synchronizes sounder and strobes that are electrically connected to it and are electrically downstream of it.

Certificates and Compliance

- UL listed
- WEEE & RoHS Compliant
- Standards: UL464, UL1638, UL1971


Terminals & Typical Connection

Cable acceptance: 12 to 18 AWG (0.75 to 2.50 mm²)

1. Strobe / Sounder Strobe
2. To next strobe or EOLR

Terminals:

1	Sounder IN+
2	Sounder IN-
3	Sounder OUT+
4	Sounder OUT-
5	Strobe IN+
6	Strobe IN-
7	Strobe OUT+
8	Strobe OUT-

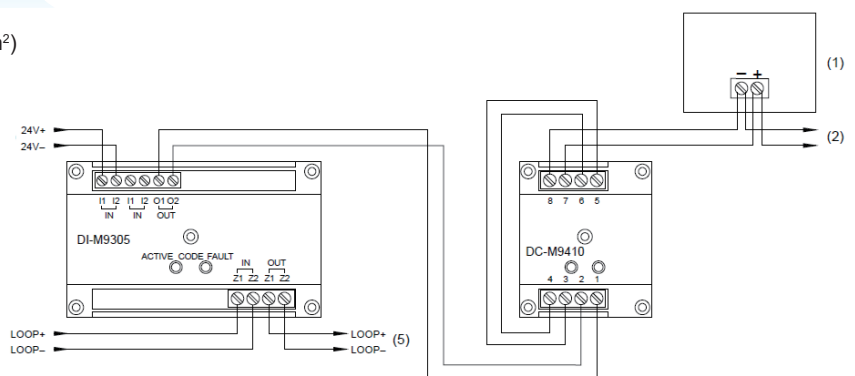

Technical Specification

Operation Voltage	24 VDC or 24 VFWR nominal
Output Rating	Max. 3.0A Limited by NAC and power output.
Synchronization	1/s within 10 ms, indefinitely 20 Ω max
Operating Temperature	32 to 120°F (0 to 49°C)
Relative Humidity	0 to 93% noncondensing

Order Information and Compatible Products

Part No.	DC-M9410
Device Name	Signal Synchronization Module
Product No.	60102326
Compatible Products	DI-M9305 Digital Single Riser Output Module DC-M9413 Series Wall Mount Sounder Strobe DC-M9415 Series Wall Mount Strobe DC-M9416 Series Ceiling Mount Sounder Strobe

IMPORTANT: This publication is a generic version in which product information is shown for informational purposes only and does not constitute a specific commitment or guarantee. We are constantly pursuing the improvement of product technology to improve product performance, for which we reserve the right to adjust the configuration and technical information of the related products without notice. In addition, the description of system performance in this publication applies only to the usual situation. As a result, there may be a variety of unpredictable special circumstances in the real world, so the realization of the relevant product performance will depend on the professional investigation and analysis and the design plan. Please contact us and we will be happy to provide you with professional advice.