

# DC-M9414R

## Wall Mount Sounder



### Description

The DC-M9414 Series Wall Mount Sounder is a fire alarm notification appliance designed for indoor use. DC-M9414R is color RED.

### Features and Benefits

The sounder is field-configurable for selecting dB output level and sounder signal type.

### Certificates and Compliance

- UL listed
- WEEE & RoHS Compliant
- Standards: UL464


### Ordering Information

Part No.	DC-M9414R
Device Name	Wall Mount Sounder
Product No.	60102319


### Installation and Appliance

1. Set the sounder features through J2 & J3.

J2	Temporal/steady horn signal output
J3	dB sound output level

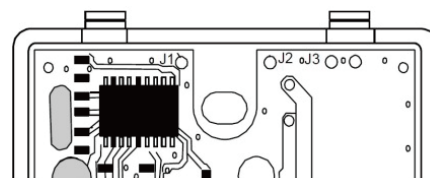

2. Cable acceptance: 12 to 18 AWG (0.75 to 2.50 mm<sup>2</sup>)

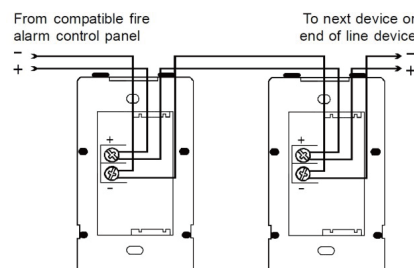

### Technical Specification

Operating Voltage	24 VDC or 24 VFWR nominal (16-33V)
Operation Current (under 24VDC)	High dBA 0.036A, Low dBA 0.027A
Sound Level (24VDC @ 10ft)	Continuous: High 88.6dBA, Low 83.5dBA Temporal: High 84.4dBA, Low 79.4dBA
Compatible electrical boxes	Single-gang box, 2-1/2 in. (64 mm) deep
Operating Temperature	32 to 120°F (0 to 49°C)
Relative Humidity	0 to 93% noncondensing
Dimension	113 x 68 x 21 (WxHxD, mm)

IMPORTANT: This publication is a generic version in which product information is shown for informational purposes only and does not constitute a specific commitment or guarantee. We are constantly pursuing the improvement of product technology to improve product performance, for which we reserve the right to adjust the configuration and technical information of the related products without notice. In addition, the description of system performance in this publication applies only to the usual situation. As a result, there may be a variety of unpredictable special circumstances in the real world, so the realization of the relevant product performance will depend on the professional investigation and analysis and the design plan. Please contact us and we will be happy to provide you with professional advice.