

# DC-M9416W

## Ceiling Mount Sounder Strobe



### Description

The DC-M9416 Series Ceiling Mount Sounder Strobe is a fire alarm notification appliance designed for indoor ceilings and walls. DC-M9416W is color WHITE.

### Features and Benefits

- Field configurable jumper options are available for selecting the desired dB output, temporal or steady sounder output, and strobe signal output.
- This strobe features an enhanced synchronization circuit to comply with the latest requirements of UL 1971 *Signaling Devices for the Hearing Impaired*.
- Synchronized operation requires to be connected directly to the NAC output and set NAC output as Synch Mode.

### Certificates and Compliance


- UL listed
- WEEE & RoHS Compliant
- Standards: UL464, UL1638, UL1971

### Ordering Information


Part No.	DC-M9416W
Device Name	Ceiling Mount Sounder Strobe
Product No.	60102324

### Installation and Appliance

1. Set the sounder signal, sound output level and strobe signal to the desired settings through J1, J2 & J3.

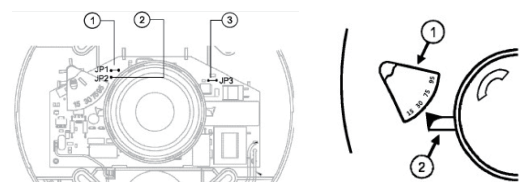

2. Slide the candela switch to the desired candela output by aligning it with the indicator located left of the switch.
3. Cable acceptance: 12 to 18 AWG (0.75 to 2.50 mm<sup>2</sup>)

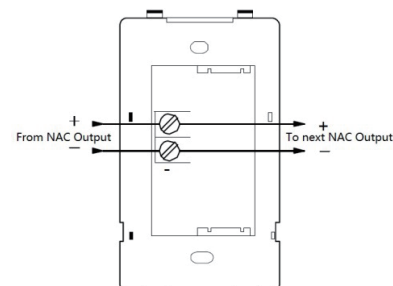

### Technical Specification

Operating Voltage	24 VDC or 24 VFWR nominal (16-33V)
Operation Current (Measured at 16VDC)	15cd 0.147A
	30cd 0.190A
	75cd 0.316A
	95cd 0.372A
Light Output	Selectable at 15, 30, 75, and 95 cd
Strobe signal rate	1 flash per second (fps)
Sound Level (24VDC @ 10ft)	Steady: High 85.4dBA, Low 83.0dBA Temporal: High 83.3dBA, Low 78.0dBA
Compatible electrical boxes	4 in. square electrical box, 2-1/8 in. deep (no extension ring)
Operating Temperature	32 to 120°F (0 to 49°C)
Relative Humidity	0 to 93% noncondensing
Dimension	170 x 55 (DxH, mm)

IMPORTANT: This publication is a generic version in which product information is shown for informational purposes only and does not constitute a specific commitment or guarantee. We are constantly pursuing the improvement of product technology to improve product performance, for which we reserve the right to adjust the configuration and technical information of the related products without notice. In addition, the description of system performance in this publication applies only to the usual situation. As a result, there may be a variety of unpredictable special circumstances in the real world, so the realization of the relevant product performance will depend on the professional investigation and analysis and the design plan. Please contact us and we will be happy to provide you with professional advice.

