

I-9301S

Addressable Output Interface



Description

I-9301S Addressable Output Interface is designed to control fire-fighting or fire notification devices. When receiving start command from FACP, it will provide 24VDC power to the controlled device to achieve automatic control.

Terminals and Installation Holes

The interface unit has 6 wires.

Z+ (White), Z- (Blue): Loop, connecting with the FACP, polarized.

V+ (Red), G (Black): 24VDC power supply, polarized.

O+ (Brown), O- (Black): Output port, polarized.

Features and Benefits

- Small size, suitable to be installed in back box
- Output line monitored for open circuit and short circuit
- The address and working mode can be modified in field through the programmer
- Built-in microprocessor processes messages intelligently

Recommended Cabling

1.0mm² or above Fire-resistant cable for Z+ and Z-

1.5mm² or above Fire-resistant cable for V+ and G

1.5mm² or above Fire-resistant cable for O+ and O-

All cables should be subject to local codes.


IMPORTANT: This publication is a generic version in which product information is shown for informational purposes only and does not constitute a specific commitment or guarantee. We are constantly pursuing the improvement of product technology to improve product performance, for which we reserve the right to adjust the configuration and technical information of the related products without notice. In addition, the description of system performance in this publication applies only to the usual situation. As a result, there may be a variety of unpredictable special circumstances in the real world, so the realization of the relevant product performance will depend on the professional investigation and analysis and the design plan. Please contact us and we will be happy to provide you with professional advice.

Application

The interface is small-sized, simply installed into the back box of connected device without fastening.
The address of the interface can be set through P-9910B handheld programmer.

Typical Connection

The typical application of the interface is shown below:

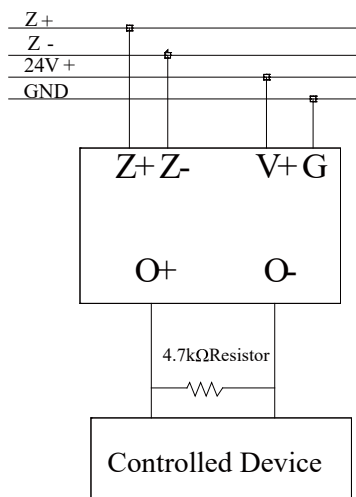

Note: The controlled device should be polarized, high resistance in reversed direction.

Technical Specification

Operating Voltage	24VDC
Average Current	Loop: $\leq 1.0\text{mA}$ 24VDC: $\leq 1.5\text{mA}$
Operating Current	Loop: $\leq 4\text{mA}$
Output Capacity	500mA/24VDC
End of Line Resistor	4.7kΩ/0.5Watt
Programming	Electronically programmed, 1-242
IP Class	IP30
Operating Temperature	-20°C ~ +55°C
Relative Humidity	$\leq 95\%$, non condensing
Material of Enclosure	ABS
Dimension	50mm X 44mm X 17mm

Accessories and Tools



Part No.: P-9910B
Device name: Handheld Programmer
Product No.: 10104894

Ordering Information and Compatible Products

Part No.	I-9301S
Device Name	Addressable Output Interface
Product No.	10104523
Compatible Panels	GST200 Intelligent Fire Panel GST200-2 Intelligent Fire Panel GST200N Intelligent Fire Panel GST-IFP8 Intelligent Fire Panel