

Fire Detection & Alarm System

EN54 One-stop Fire Solutions

I-9602LW-LPG/NG Addressable Combustible Gas Detector



- Available for LPG, Natural Gas
- Built in sounder with 2 stage alarm, Manual reset, and control (on/off) of relay contacts
- Drift compensation, to suit environment changing extensively
- Self-diagnostic



GST-FT24N Fire Telephone Panel 24 Zone/19" Rack-mount



P-9911 (F) Fixed Fire Telephone Handset



P-9911 (J) Fire Telephone Jack



S-9102R Standalone Optical Smoke Detector



- Self-contained optical smoke detector and alarm sounder
- Test/ Reset Button
- Battery Life: 3 years
- Low battery power indication

Fire Telephone System

GST-FT8WN Fire telephone Panel 8 Zone/Wall-Mount



- Conventional model
- Networkable up to 8 panels
- Friendly interface and flexible application
- Fully cable fault monitored
- One zone Failure will not impact other zones

P-9911 (H) Hands-free Speaker Fire Telephone



P-9911 (M) Mobile Fire Telephone Handset



DC-9102(IS) Intrinsically Safe Photoelectric Smoke Detector



- Integrated algorithm for high sensitivity
- Ex Mark: Exib II CT6 Gb
- Ex Certificate: CE21.2424

DB-01(IS) Intrinsically Safe Detector Base



DI-9104Exd Digital Flame Proof UV Flame Detector



- Pick up the ultraviolet light from flaming material
- Perfect for an open fire with much radiation and no smoldering stage
- Ingress Protection: IP66
- PRESAFE 14 ATEX 5547

D-9107Exd Digital Flame Proof Dual IR Flame Detector



- Dual band Infrared flame detection
- Immune to sunlight, artificial light, heat radiation, providing a means of reliable operation
- Ingress Protection: IP66
- PRESAFE 14 ATEX 5548X

Explosion Proof Products

DC-9101(IS) Intrinsically Safe Combination Heat PhotoelectricSmoke Detector



- 3 smoke sensitivity levels
- FT and RR
- Ex Mark: Exib II CT6 Gb
- Ex Certificate: CE21.0155

DC-9103(IS) Intrinsically Safe Rate of Rise and Fixed Temperature Heat Detector



- BS and A1R
- Ex Mark: Exib II CT6 Gb
- Ex Certificate: CE22.3906

D-9105RExd Digital Flame Proof Reflective Beam Detector




- Integration of the emitting and receiving part makes for easy installation and accurate optical pathway
- Built-in microprocessor enables intelligent judgment of fire alarm and fault
- Easy alignment ensures a single person installation
- Drift-compensation for factors weakness, such as dust contamination, positional excursion, and component ageing
- Ingress Protection: IP66

DI-9204Exd Explosion Proof MCP



- Built-in 8-bit microprocessor control
- Non-break-glass type, resettable by special key
- With wide temperature range, Ingress Protection 65, the MCP can apply to vessels, outdoors and explosive hazard-ous environment
- Ingress Protection: IP65
- PRESAFE 14 ATEX 5549X

System Diagram

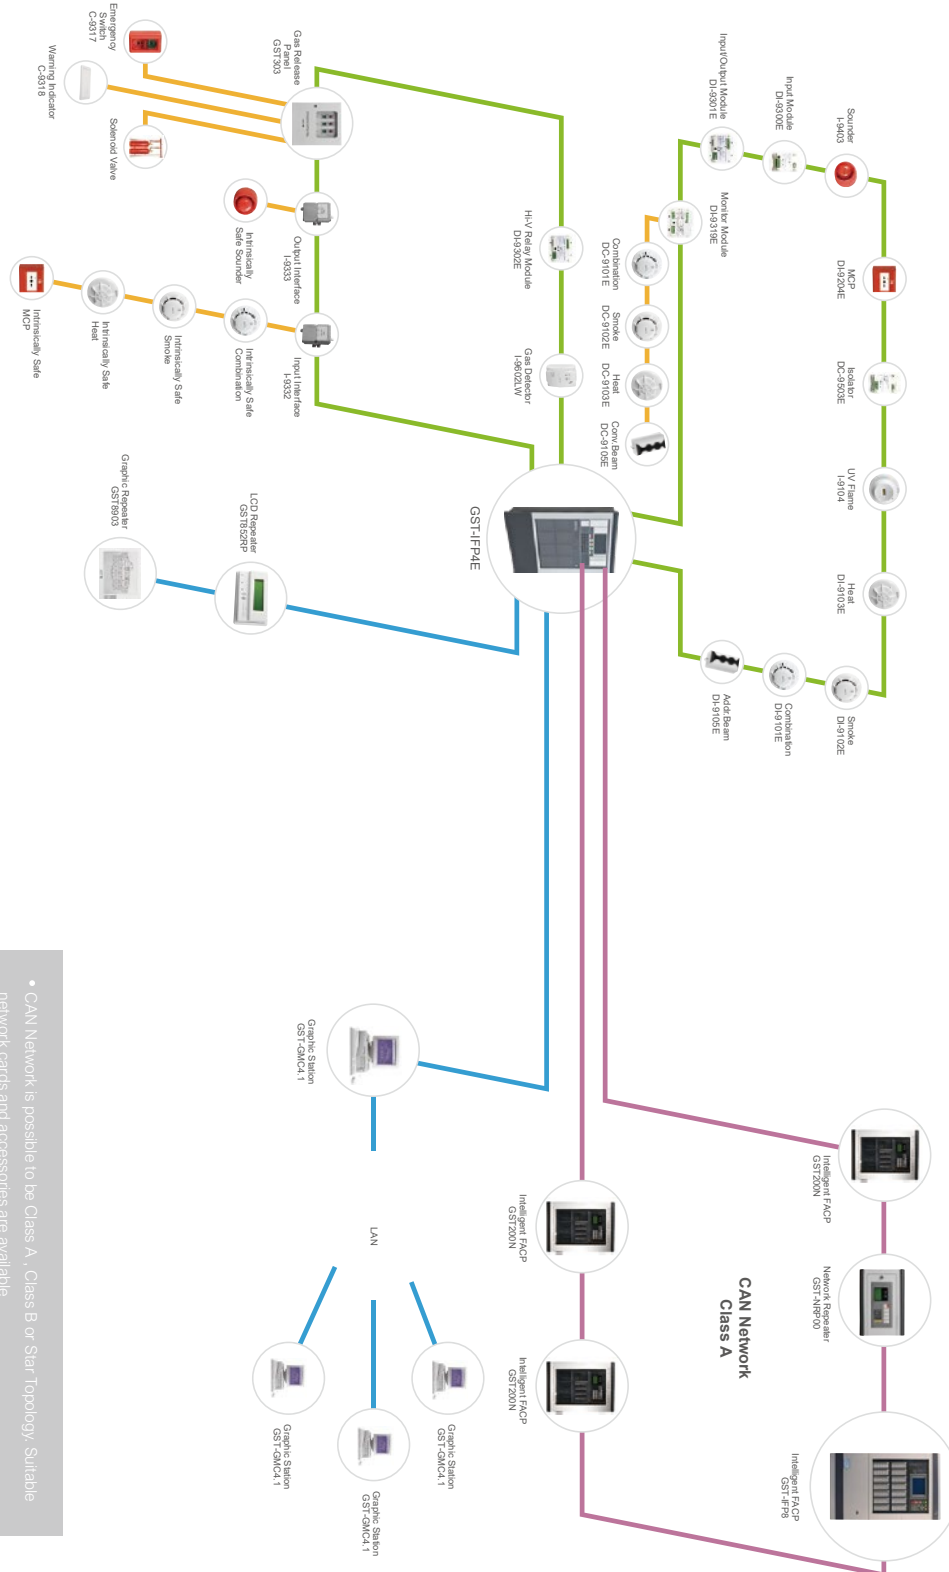

- CAN Network is possible to go Class A, Class B or Star topology. Suitable network cards and accessories are available
- External 24VDC Power Supply may be required by some devices
- Max. 8 Remote Users can be connected to the host PC through LAN

SEA
KGS Fire & Security Singapore Pte Ltd
Add: 40 Paya Lebar Lane, #01-04 Singapore 609216
Tel: +65 6361 6038
Email: luan.luan@gksolutions.com

INDIA
Kidd Global Solution
Add: 4th Floor, RMZ Spire Tower 110, Spira Gram
Crail Village, HITECH City, Hyderabad Telangana
500032, India
Tel: +91 9866777017, +91 9990045046
Email: Sunkumar.venkata@gksolutions.com, indrajit.singh@gksolutions.com

Contacts in China
ASA
Tel: +86 21 39395853
Email: asasiestas.gst@gksolutions.com
EMEX
Tel: +86 21 39395852
Email: emexasias.gst@gksolutions.com
LA & ANZ
Tel: +86 21 3939 8533
Email: asiasias.gst@gksolutions.com
China's Connected Projects Overseas
(Chinese spoken only)
Tel: +86 10 6505 6119
Email: Overseas.gst@gksolutions.com

Gulf Security Technology Co., Ltd.
80 Changling East Road Economic & Technology Development Zone, Qihuangdao, Hebei, China
www.gst.com.cn/enr/

Version: 2/2017
2010 Gulf Security Technology Co., Ltd.

About GST

Your Trusted Global Fire Safety Partner

GST (Gulf Security Technology Co., Ltd), the leading one-stop provider of fire safety solutions worldwide.

With an unwavering commitment to excellence, safety, and innovation, GST stands as a beacon of trust in the realm of fire safety. Our comprehensive range of fire products and custom fire system solutions cater to diverse industries, ensuring optimal protection across various environments.

We are proud to be guarding property and lives around the world. With our sales network across the globe, GST has earned a high reputation for our reliable product quality and excellent service.



Intelligent Addressable Fire Alarm System(New)

GST-IFP4E

Intelligent Fire Alarm Control Panel



- 7-inch Touch Screen, 800 x 480 resolution
- Support 1-6 loops in Class A style (additional battery box is required if 6 loops fully loaded)
- 242 addressable devices per loop mixing various types of devices, Max. 1452 addresses
- Max 8 ZCP panels ,each panel with individual programmable buttons & LED indicators.
- Multi-language support
- Graphic Cause and Effect programing AND, OR, NAND,NOR logic, support virtual variable
- Auto learn panel hardware configuration and loop devices, device type mismatch notice
- Detector chamber dirty level reporting, adjust dirty level threshold
- History records of 100,000 events
- "Walk test", silent or audible
- Type A Type B Positive Alarm Sequence
- E-mail notification
- USB port for loading project database and firmware update
- Programming via PC or panel keypad and touch screen
- Support USB dongle for securing project database
- Network with GST EN54 Intelligent Fire panels up to 250 nodes on CAN, Optic Fiber and TCP/IP

GST-NR2EC (CAN)/GST-NR2EF (Fiber)

Intelligent Fire Alarm Control Panel



- Receive message and send command (Reset, Silence, ACK etc.) through network
- Network interface: CAN (Class A) for NR2EC, Optical Fiber for NR2EF
- LCD display unit of 800 x 480, 7.0" color TFT LCD
- Capacitive Touch screen
- Historical file 100,000 events capacity
- Password and key-protected non-volatile memory
- User programmable password
- Field-programmable, or by PC with GST-DEF defining tool
- Network with GST EN54 Intelligent Fire panels up to 250 nodes on CAN, Optic Fiber and TCP/IP

Intelligent Addressable Fire Alarm System

GST200N-1/2

Intelligent Fire Alarm Control Panel



- One / Two loop addressable fire detection panel
- Capacity 235 intelligent devices per loop, capacity per panel up to 477 devices
- 8X18 characters LCD screen
- 30 Logical configurable zones
- Non-Volatile memory ensures the data does not loss even if power supply is accidentally removed
- Net-workable with all GST intelligent fire panels Built-in Rs485 repeater output
- Maximum 10 repeaters
- Optional panel Printer / Graphics Interface

GST-IFP8

Intelligent Fire Alarm Control Panel



- Maxi.8 Class A Loops (242) capacity (1936) addressable points
- 15X40 LCD screen, assisting the 17 LEDs to display important information
- Up to 999 programmable zones and 140 zone indications
- Network with all GST Intelligent Fire panels up to 240 nodes on Copper, Optic Fiber and TCP/ IP
- Optional RS 485 mimic and repeater up to 64
- Optional Graphics Interface

GST-NRP00

Network Repeater Panel



- Provide remote display and control of system
- 8X18 characters LCD screen
- 15 LEDs to display important information
- Password protected access levels
- Network-wide operation: Acknowledge, Silence, Reset

DI-9101E

Intelligent Multi Sensor Detector



- Combined the features of the Intelligent Optical smoke and Dual Heat Detector
- 2 levels sensitivities programmable
- 8 Bit intelligent processor with A/ D converter
- Drift compensation, Reed Switch Test, Auto Diagnosis
- Fire LED for 360-degree view, option to be switched off
- Built in remote indicator output

DI-9102E

Intelligent Optical Smoke Detector



- Aesthetically pleasing low Profile design
- 8 Bit intelligent processor with A/ D converter
- Built in algorithm maps for false alarm rejection
- 2 levels sensitivities programmable
- Drift compensation, Reed Switch Test, Auto Diagnosis
- Built in remote indicator output
- Fire LED for 360-degree view, option to be switched off

DI-9103E

Intelligent Dual Heat Detector



- Fixed Temperature and Rate of Rise Heat Detection
- 8 Bit intelligent processor with A/ D converter
- A1R, A2S, BS, 3 detections class programmable
- High Sensitivity, Reed Switch Test, Auto Diagnosis
- Built in remote indicator output
- Fire LED for 360-degree view, option to be switched off

DI-9105E

Intelligent Reflective Beam Detector



- Integrated laser pointer and digital display
- 4 Selectable sensitivity levels
- 4 detection distance settings from 5 to 100 m
- Ingress protection to IP66 with a basic glue-seal treatment
- Loop Powered, no external supply is needed

DI- 9204E

Digital Manual Call Point



- Re-settable (non-breaking glass) via special key
- Optional back-box for surface mount
- Dual activation indication

I-9403/I-9404

Intelligent Sounder Strobe/Sounder



- Two parts constructions with mounted termination allows easy installation
- Evacuate only or Alert/ Evacuate Mode
- 16 programmable alarm tones
- Loop powered or external 24VDC powered
- Strobe can program work in Light or Sound or Light plus Sound
- Strobe provided by high intensity LED cluster

DI-9301E

Digital Single Input and Output Module



- Din-Rail mount or surface mount
- Addressable 1/2 points with 2A @ 30VDC relay output Contact
- Input can be configured as NO/ NC or self-confirmation of output
- Cable monitoring function

DI-9300E

Digital Single Input Module



- Din-Rail mount or Surface mount
- Input can be configured as NO/ NC
- Cable monitoring function

DI-9305E

Digital Single Riser Output Module



- Din-Rail mount or Surface mount
- Relay capacity 2A@30VDC or maximum 60W 70V/100V audio speakers
- Cable monitoring function
- Double-contact relay switching 2 lines together

D1-9319E

Digital Zone Monitor Unit



- Din-Rail mount or surface mount
- Interfaces with conventional fire detection-equipment/panels etc
- Each module can connect up to 30 conventional detectors or MCP
- Provides a FORM-C dry contact output with the capacity of 2A @ 30VDC
- Two indicators for fire and fault

DC-9503E

Short Circuit Isolator



- Automatically restore once the fault has been cleared
- Support Class A and Class B loop connection
- Maximum 128 isolators can be connected to each loop
- Maximum 50 devices between two isolators
- LED status indicator

Conventional Fire Alarm System

GST102A/104A/108A/116A

Conventional Fire Alarm Panel



- Each zone can have up to 32 conventional detectors
- Provide fire, fault, aux, power, sounder outupt and disablement relay output
- Both End of Line Register and Active End of Line applicable
- Reserved repeater panel interface
- I/O port anti-surge special protection
- Options to program supervisory zones, with individual supervisory indicator and supervisory relay output

DC-9101E

Innovative Conventional Multi Detector



- Combined the features of the Optional Smoke and the Heat detector
- Fire LED for 360-degree view, option to be switched off
- Sensing Chamber for exceptional dust proof ability
- White and Black color options

DC-9102E

Innovative Conventional Smoke Detector



- Light scattering technology with high performance chamber
- Suitable for detecting slow burning or smoldering fires
- 2 smoke sensitivity levels can be set
- Built in remote indicator output
- Fire LED for 360-degree view, option to be switched off

DC-9103E

Innovative Conventional Heat Detector



- Combined fixed temperature and rate of rise heat detection
- Fire LED for 360-degree view, option to be switched off
- Built in remote indicator output

C-9104

Conventional Ultraviolet Flame Detector



- Three sensitivity levels
- High sensitivity, reliable performance
- Dust-proof, damp-proof and corrosion-proof

DC-9105E

Conventional Reflective Beam Detector



- Integrated laser pointer and digital display
- 4 Selectable sensitivity levels
- 4 detection distance settings from 5 to 100 m
- Ingress protection to IP66 with a basic glue-seal treatment
- 24V Powered

R6601/R6602

Conventional Smoke/ Heat detector, 4 Wire



- Open circuit when operating, contact closed/ self-locked when alarming
- Built-in MCU for real time data sampling and processing
- R6601: Unique labyrinth protect against insect, dust light infiltration
- R6602: Fixed and RoR temperature alarm

DB-01/DZ-03

Common Detector Base



- DB-01 for D series detectors
- DZ-03 for C-9104, R6601 and R6602

C-9403/C-9404

Conventional Sounder Strobe/Sounder



- Two parts constructions with base mounted termination allows easy installation
- 2 selectable alarm tones
- Strobe provided by high intensity LED cluster

DC-9204E

Innovation Conventional Manual Call Point



- Re-settable (non-breaking glass) via special key
- Semi-flush or surface mount installation
- Dual activation indication
- Optical back-box for surface mount